



WE BELIEVE  
OUR EXPERTISE  
HAS STOOD THE  
TEST OF TIME

Made for Ireland since 1960



welcome to our ideology

[www.idealboilers.ie](http://www.idealboilers.ie) |   

 **GRUPE  
ATLANTIC**  
UK, ROI & NORTH AMERICA DIVISIONS

# WELCOME TO OUR IDEOLOGY



Market leading  
warranties



Year round  
customer support



Made for Ireland  
since 1960

At Ideal Boilers we believe in complete comfort and the last thing you should worry about is your boiler. That's why we rigorously test each and every one of our products with dozens of safety and reliability checks before they leave our Yorkshire based factory. This is why we confidently offer industry leading warranties on our boilers so we can go the extra mile for our customers.

We believe in delivering customer support that makes you smile. Should you need us, our UK based contact centre is open 364 days a year. If your query isn't resolved over the phone, we aim to get an engineer to your property the same day or the next.

## CONTENTS

- 04 - We believe in putting installers first
- 06 - Groupe Atlantic
- 08 - **We believe in boilers for every application**
- 10 - Vogue System IE
- 12 - Logic System IE
- 14 - Vogue System IE
- 16 - Logic Combi IE
- 18 - Logic Heat IE
- 20 - Clearances & dimensions
- 22 - Evomax
- 24 - Thermstore
- 26 - Solar Thermstore
- 28 - Vented Stainless Cylinder
- 30 - Technical Specifications
- 36 - **We believe in getting the most out of your system**
- 38 - Touch Connect
- 40 - Controls
- 42 - Accessories
- 44 - Flue Siting
- 45 - Flue Kits & Flue accessories
- 46 - **Installer Connect**
- 51 - **Training**

Ideal Boilers Customer Service:

**0044 1482 498660**

Ideal Boilers Technical Help:

**0044 1482 498663**

ROI Ideal Boilers Technical Help:

**01 6917426**

Ideal Boilers, PO Box 103, National Avenue,  
Kingston upon Hull, East Yorkshire, HU5 4JN

E: [enquiries@idealboilers.com](mailto:enquiries@idealboilers.com)

# WE BELIEVE IN PUTTING INSTALLERS FIRST



## BUSINESS SUPPORT TAILORED TO YOU

Installer Connect is the installer loyalty scheme from Ideal Boilers. The scheme rewards you for the Ideal boilers you install, earning you up to €30 per Ideal boiler you install, as well as offering a number of business support services including easy warranty registrations, service reminders & Marketing Toolbox where reward points are worth double.

To find out more or to become a member, visit:

[www.installerconnect.com](http://www.installerconnect.com)



## SERVICE REMINDERS

Select the 'Service Reminder' option when registering your boilers on Installer Connect.

Our Service Reminders are simple to use and mean you could generate up to 10 years additional service revenue from the Ideal boilers you fit.

Once you're registered for our Service Reminder scheme, for every Ideal boiler you install, we'll make sure we do the following for the duration of the product's warranty, which could be up to 10 years!

- 1 Contact your customers to remind them that their Ideal boiler needs an annual service
- 2 We'll send your customer your name and contact number for them to give you a call and book a service.
- 3 We'll then send you a text to let you know we've contacted your customer so that you can follow up with them.



## AFTERSALES SUPPORT

With a range of tools to help you grow your business, Ideal is on hand to ensure you have the support you need.

Our dedicated Customer Service department is available 364 days a year, 8am to 8pm Monday to Friday, as well as 8am to 6pm on a Saturday and 8am to 12 noon on a Sunday.

- Installer Helpline  
**01 6917426**
- Davies Helpline (including parts)  
**01 8511700**  
Davies opening hours are  
Monday - Friday 8am-5pm  
Saturday 9am - 1pm
- Email [idealheating@davies.ie](mailto:idealheating@davies.ie)
- Homeowner Helpline  
**01 8511700**

We also have a team of expert engineers, fully trained to exacting standards, on hand to provide one-to-one advice on the road, over the phone or online ensuring you're fully supported, wherever and whenever you need.



# GROUPE ATLANTIC

UK, ROI & NORTH AMERICA DIVISIONS

Groupe Atlantic is the parent company of many well known household heating brands together we heat millions of homes across the world.

## ideal BOILERS

Taking boilers from basements to kitchens through to producing pioneering high efficiency technologies, we have continually delivered reliable products for over 100 years.

Since 1960, Ideal have been providing high quality products made specifically for Ireland.

With our reliable boilers and market leading warranties, its easy to see why we are the nations number one boiler manufacturer.

## ideal COMMERCIAL

The UK's market leader of high efficiency commercial heating solutions. Whether it's a wall hung or floor standing solution, our products come with over 100 years of knowledge and skill as standard.



## atlantic

Atlantic, founded in 1968, is a well-established and renowned French brand, expert in all types of heating systems and home comfort appliances, with a worldwide presence. We have developed a complete range of modern and reliable equipment that brings you daily an optimum comfort whilst optimising cost savings.

We deliver electric convector heating, electric radiators, radiant heaters and towel dryers. Ease of use, energy efficiency and reliability are the key principles driving product development and features such as ECODOMO and SMART PILOT ensure that installers and homeowners get the most out of their installations.





# WE BELIEVE IN BOILERS FOR EVERY APPLICATION



SYSTEM BOILERS



COMBI BOILERS



HEAT BOILERS

# reliables



# Vogue System IE

S15 S18 S26 S32

**10**  
YEAR WARRANTY\*



Up to 32kW output



Premium components



Opentherm ready



Touch RF Heat & System compatible



Made for Ireland



NOx class 6



Simple to install & service



Easy to use full colour display



Frost protection



Stainless steel heat exchanger



**UP TO €30**

EARN INSTALLER CONNECT POINTS FOR EVERY VOGUE IE SYSTEM YOU REGISTER

The Vogue IE System is engineered with quality in mind, from design, component specification, manufacture and build, through to consumer use. All models in the Vogue IE range deliver premium performance and reliability paired with unique features such as the full colour screen.

## MARKET LEADING WARRANTY

Demonstrating our confidence in the quality and reliability of our boilers, the Vogue leads the way with warranty length.

With a 10 year warranty as standard you and your customers will be provided with peace of mind for years to come.

## AWARD WINNING BOILERS

Our boilers have been awarded Good Housekeeping Reader Recommended status in 2013, 2017 and 2018 for ease of use and low noise levels, amongst other outstanding product details that left customers wanting to recommend Ideal Boilers to their friends and families.

## HIGHLY EFFICIENT

All of our boilers achieve at least band A levels of efficiency, helping you reduce your customers energy bills and carbon footprint so efficiency isn't something they will need to worry about.



## PREMIUM QUALITY COMPONENTS

- Large 10 litre expansion vessel
- Stainless steel heat exchanger
- Low energy modulating Grundfos pump
- 24V gas valve

## EASY TO INSTALL AND SERVICE

- Low boiler lift weight from 30.7kg
- Pre-wired mains lead (2m)
- Cool burner door technology
- Long maximum flue lengths with easy access sampling points
- Easy to read pressure gauge
- Control box with push-in cable clamps

## END USER BENEFITS

- LPG conversions available on all outputs
- Backlit 3.5" LCD full colour display
- Multi-function buttons for simplified end user operation
- Up to 5:1 modulation
- Service display and installer phone number input
- Rotary control for easier user operation
- Stylish aesthetics with full size door complete with damped opening

# Logic System IE

S15 S18 S24 S30



Compact cupboard fit



Easy to see pressure gauge



Opentherm ready



Touch RF Heat & System compatible



Made for Ireland



NOx class 6



Frost protection



Easy to use fully back-lit LCD display



**UP TO €20**

EARN INSTALLER CONNECT POINTS FOR EVERY LOGIC IE SYSTEM YOU REGISTER

With millions of Logic boilers installed across Europe since launch it's easy to see why it has become one of the nation's favourite boilers. The Logic IE is perfect for a range of installations.

## MARKET LEADING WARRANTY

Providing you and your customers with confidence and peace of mind the Logic has a full parts and labour warranty for 7 years. Which demonstrates just how confident we are in the quality and reliability of our boilers.

## AWARD WINNING BOILERS

Our boilers have been awarded Good Housekeeping Reader Recommended status in 2013, 2017 and 2018 for outstanding product features that left customers wanting to recommend Ideal Boilers to their friends and families.



## HIGHLY EFFICIENT

All of our boilers achieve at least band A levels of efficiency, helping you reduce your energy bills and carbon footprint so efficiency isn't something you need to worry about.



## EASY TO INSTALL AND SERVICE

- Low boiler lift weight of 26.1kg
- Compact cupboard fit
- Easy to see pressure gauge
- Stand-off kit including pre-pipe options
- Wide range of flueing options
- Preformed copper tails
- Pre-wired mains lead (2m) & spare fuses included
- Safety valve outlet pipe included

## HOUSEHOLDER BENEFITS

- Award winning range
- Service indication
- Compatible with a range of additional controls inc. weather compensation and OpenTherm controls
- LPG conversion kit available for 24IE and 30IE boilers

## QUALITY AND RELIABILITY AS STANDARD

- Low component count maximising reliability
- Latest generation Honeywell gas valve
- Built in frost protection



# Vogue Combi IE

C26 C32 C40

**10**  
YEAR WARRANTY\*



Up to 40kW output



Premium components



Open therm ready



Touch RF & Touch Connect Compatible



Made for Ireland



NOx class 6



Simple to install & service



Easy to use full colour display



Frost protection



Stainless steel heat exchanger



**UP TO €30**

EARN INSTALLER CONNECT POINTS FOR EVERY LOGIC IE COMBI YOU REGISTER

The Vogue System IE is engineered with quality in mind, from design, component specification, manufacture and build, through to consumer use. All models in the Vogue IE range deliver premium performance and reliability paired with unique features such as the full colour screen.

## MARKET LEADING WARRANTY

Demonstrating our confidence in the quality and reliability of our boilers, the Vogue leads the way with warranty length.

With a 10 year warranty as standard you and your customers will be provided with peace of mind for years to come.


## AWARD WINNING BOILERS

Our boilers have been awarded Good Housekeeping Reader Recommended status in 2013, 2017 and 2018 for ease of use and low noise levels amongst other outstanding product details that left customers wanting to recommend Ideal Boilers to their friends and families.



## HIGHLY EFFICIENT

All of our boilers achieve at least band A levels of efficiency, helping you reduce your customers energy bills and carbon footprint so efficiency isn't something they will need to worry about.

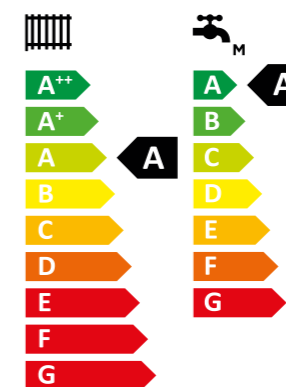

## PREMIUM QUALITY COMPONENTS

- Hydrobloc incorporating a 24V stepper for enhanced reliability
- Large 10 litre expansion vessel
- Stainless steel heat exchanger
- Low energy modulating Grundfos pump
- 24V gas valve

## EASY TO INSTALL AND SERVICE

- Low boiler lift weight from 32.4kg
- Pre-wired mains lead (2m)
- Cool burner door technology
- Long maximum flue lengths with easy access sampling points
- Easy to read pressure gauge
- Uniform control opening across all Ideal Vogue and Logic combis
- Control box with push-in cable clamps

## END USER BENEFITS

- LPG conversions available on all outputs
- Backlit 3.5" LCD full colour display
- Multi-function buttons for simplified end user operation
- Up to 7:1 modulation
- Service display and installer phone number input
- Rotary control for easier user operation
- Stylish aesthetics with full size door complete with damped opening



# Logic Combi IE

C24 C30 C35



Compact cupboard fit



Easy to see pressure gauge



Opentherm ready



Touch RF & Touch Connect Compatible



Made for Ireland



NOx class 6



Frost protection



Easy to use fully back-lit LCD display



**UP TO €20**

EARN INSTALLER CONNECT POINTS FOR EVERY LOGIC IE COMBI YOU REGISTER

With millions of Logic boilers installed across Europe since launch it's easy to see why it has become one of the nation's favourite boilers. The Logic IE is perfect for a range of installations.

## MARKET LEADING WARRANTY

Providing you and your customers with confidence and peace of mind the Logic has a full parts and labour warranty for 7 years. Which demonstrates just how confident we are in the quality and reliability of our boilers.


## AWARD WINNING BOILERS

Our boilers have been awarded Good Housekeeping Reader Recommended status in 2013, 2017 and 2018 for outstanding product features that left customers wanting to recommend Ideal Boilers to their friends and families.



## HIGHLY EFFICIENT

All of our boilers achieve at least band A levels of efficiency, helping you reduce your energy bills and carbon footprint so efficiency isn't something you need to worry about.

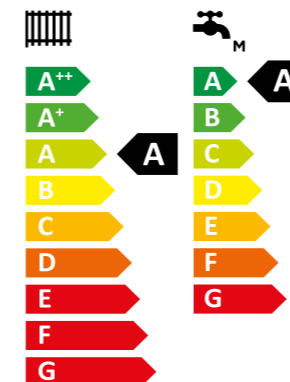

## EASY TO INSTALL AND SERVICE

- Low boiler lift weight from 29.2kg
- Compact cupboard fit
- Easy to see pressure gauge
- Universal condensate connection
- Stand-off kit and pre-pipe options
- Wide range of flueing options
- Preformed copper tails
- Pre-wired mains lead (2m) & spare fuses included
- Safety valve outlet pipe included
- Built-in filling loop

## HOUSEHOLDER BENEFITS

- Award winning range
- Service indication
- Pre-heat function
- Symbols and text display
- Compatible with a range of additional controls inc. weather compensation and OpenTherm controls
- LPG conversion kit available for 24IE and 30IE boilers

## QUALITY AND RELIABILITY AS STANDARD

- Low component count maximising reliability
- Latest generation Honeywell gas valve
- Simple diverter valve design with no dynamic seals

# Logic Heat IE

H12 H15 H18 H24 H30



Compact cupboard fit



OpenTherm ready



Touch RF Heat & System compatible



NOx class 6



Frost protection



Easy to use fully back-lit LCD display



Direct rear flue option



UP TO €20

EARN INSTALLER CONNECT POINTS FOR EVERY LOGIC IE YOU REGISTER

With millions of Logic boilers installed across Europe since launch it's easy to see why it has become one of the nation's favourite boilers. The Logic IE is perfect for a range of installations.

## MARKET LEADING WARRANTY

Providing you and your customers with confidence and peace of mind the Logic has a full parts and labour warranty for 7 years. Which demonstrates just how confident we are in the quality and reliability of our boilers.

## AWARD WINNING BOILERS

Our boilers have been awarded Good Housekeeping Reader Recommended status in 2013, 2017 and 2018 for outstanding product features that left customers wanting to recommend Ideal Boilers to their friends and families.



## HIGHLY EFFICIENT

All of our boilers achieve at least band A levels of efficiency, helping you reduce your energy bills and carbon footprint so efficiency isn't something you need to worry about.



## EASY TO INSTALL AND SERVICE

- Compact cupboard fit
- Low lift weight of 22.7kg
- Stand-off kit
- Wide range of flueing options
- Direct 80mm diameter rear flue option
- Top system connections
- Low minimum head requirement

## HOUSEHOLDER BENEFITS

- Award winning range
- Service indication
- Compatible with a range of additional controls inc. weather compensation and OpenTherm controls
- LPG conversion kit available for 24 and 30kW boilers
- Large output range 12 - 30kW

## QUALITY AND RELIABILITY AS STANDARD

- Low component count maximising reliability
- Latest generation Honeywell gas valve
- Built in frost protection

# Vogue IE

Clearances & dimensions




**Note:** The minimum front clearance when built into a cupboard is 5mm from the cupboard door but 450mm overall clearance with the cupboard door open is required for servicing.


\*Bottom clearance after installation can be reduced to 5mm. However, 100mm is required for servicing.

# Logic IE

Clearances & dimensions

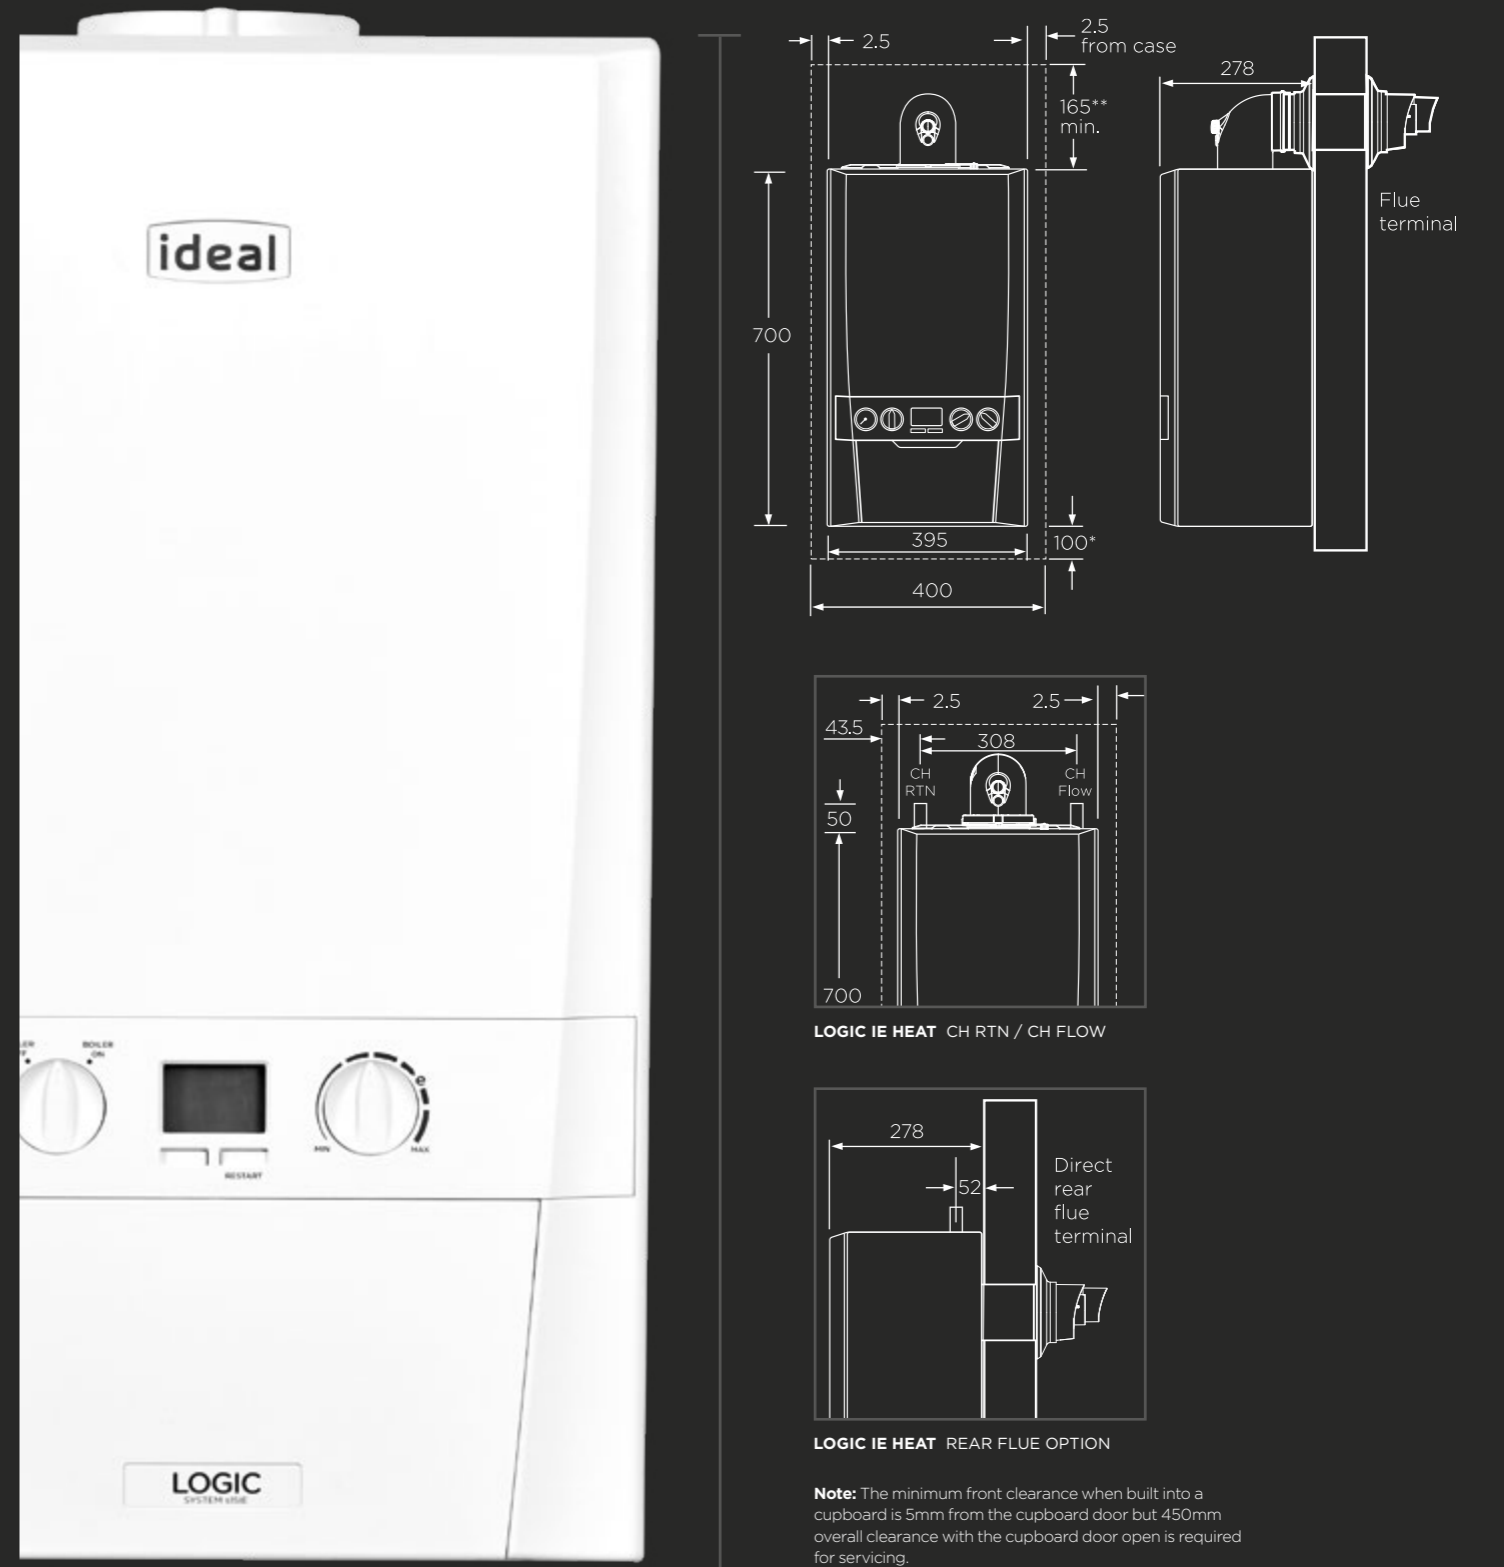

LOGIC IE HEAT CH RTN / CH FLOW

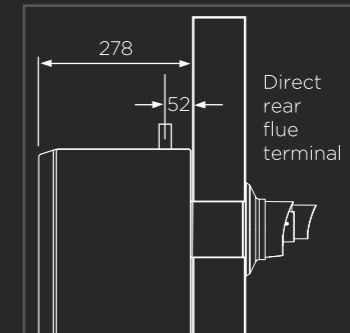

LOGIC IE HEAT REAR FLUE OPTION

**Note:** The minimum front clearance when built into a cupboard is 5mm from the cupboard door but 450mm overall clearance with the cupboard door open is required for servicing.

\*Bottom clearance after installation can be reduced to 5mm. However, 100mm is required for servicing.

\*\*Reduces to 100mm with direct rear flue option.



# Evomax

30 - 150kW



Triple E Scheme Approved (SEAI)




Robust & light aluminium silicon alloy heat exchanger



Up to 110% part load efficiency



High 5:1 turndown

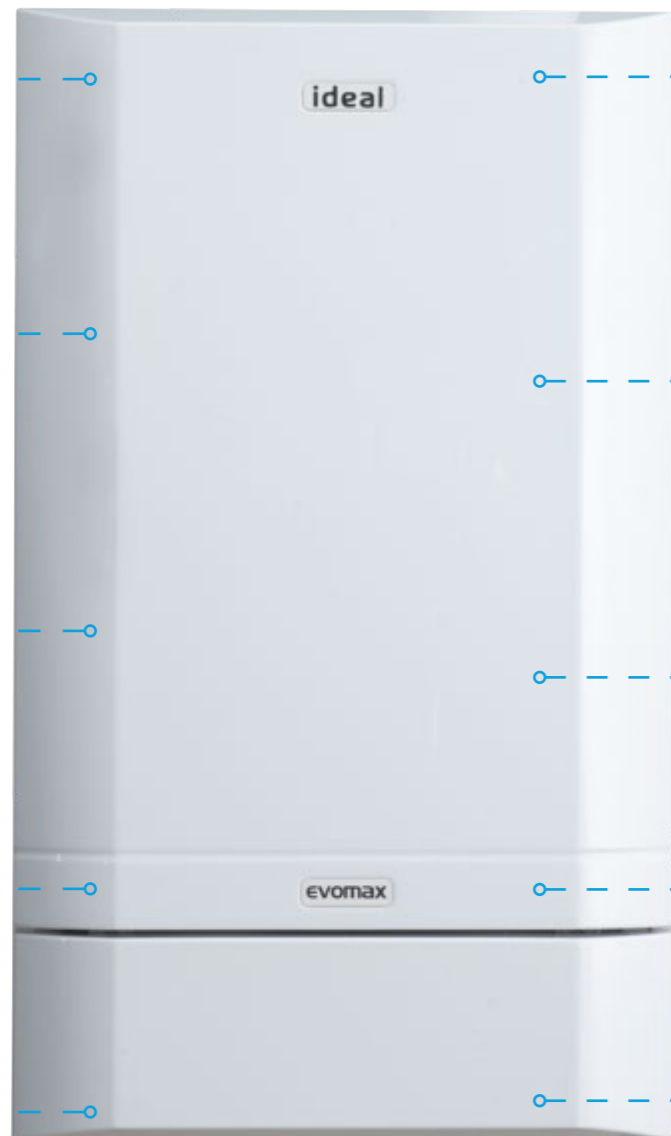

Compact - one width & height for easy siting



Simple controls interface with large backlit display



Comprehensive range of flue, fixing and control options



NOx class 5



BIM objects available

Available in outputs of 30, 40, 60, 80, 100, 120 and 150kW, the Evomax is designed to ensure all installation requirements can be achieved. There is also an LPG Evomax range from 30 - 80 kW for off mains installations.



## EVOMAX CASCADE

Evomax Frame and Header Kits are suitable for modular (cascade) boiler installations, and are available up to a maximum output of 600 kW in both in-line (standard and low height versions) and back-to-back arrangements.



## CLEARANCES & DIMENSIONS

ALL DIMENSIONS IN MM

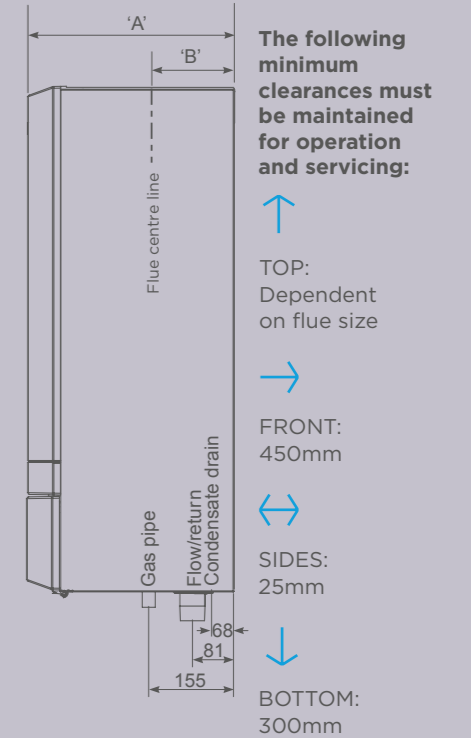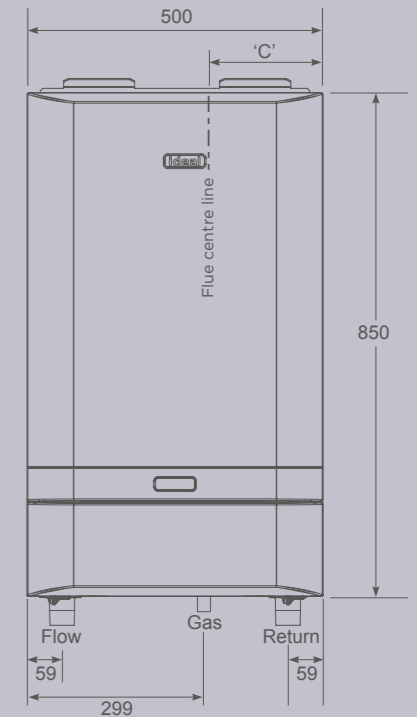

The following minimum clearances must be maintained for operation and servicing:

- ↑ TOP: Dependent on flue size
- FRONT: 450mm
- ↔ SIDES: 25mm
- ↓ BOTTOM: 300mm

BOILER	DIM A	DIM B	DIM C
30, 40, 60, 80	360	130	118
100, 120	520	226	118
150	610	233	120

Clearance between multiple boiler installations: 25mm

**UP TO €30** EARN INSTALLER CONNECT POINTS FOR EVERY EVOMAX YOU REGISTER

# Thermstore IE

90 120 150 180 210 250 300 400

**25**  
YEAR WARRANTY\*

25 Year vessel warranty

**2**

Year components warranty



Duplex stainless steel construction




Complete with all quality fittings according to model



Wider base for additional stability

## MORE FEATURES

- Corrugated heat transfer coil to give 20% faster recovery than plain tube
- Complete with all quality fittings according to model
- Manufactured in accordance with BS EN 12897

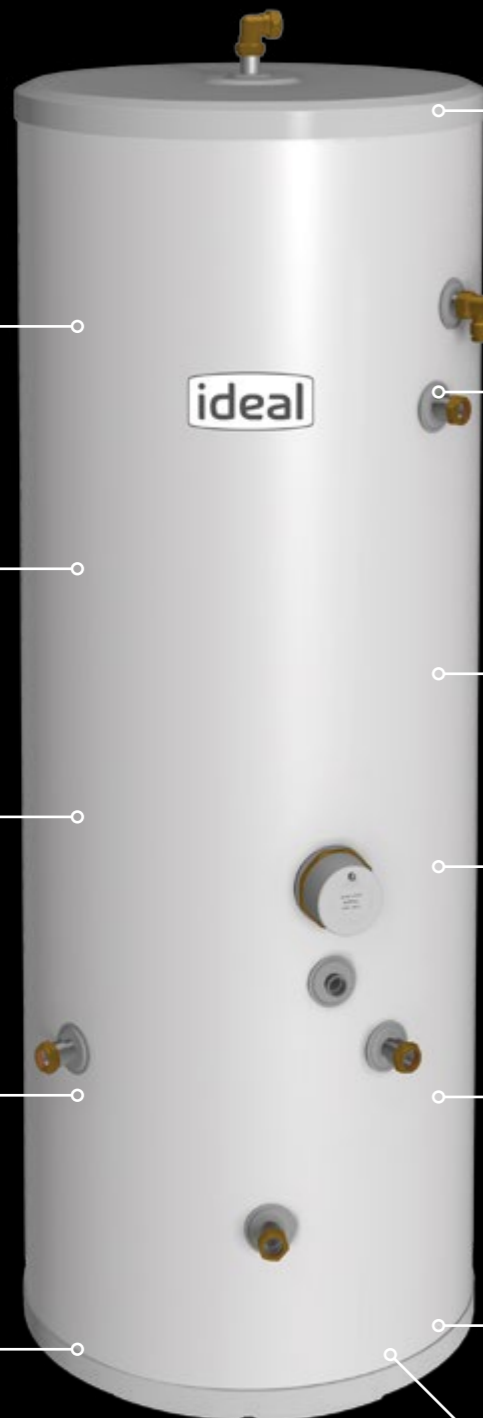

Global Warming Potential (GWP) of 1



New flat top & base with 20% more HCFC insulation



Aligned tapping positions for ease of installation



Low standing heat loss



Lightweight for easy installation



Colour matched components



ErP compliant


The Ideal Thermstore IE range of stainless steel unvented, indirect cylinders are manufactured to the highest standards. We have 8 models in the range, all with a 2 year parts and labour warranty, so you can be sure the Thermstore allies the twin demands of excellent product quality with outstanding value.

## STANDARD APPLIANCE

- Hot water draw off 3/4" compression
- Temperature and pressure relief valve 90°C/6 bar
- Hot water secondary return 22mm (not fitted to cylinders below 210 litres)
- Immersion heater 1 3/4" BSP 3 kW
- Cold supply 22mm compression
- Dual control/overheat thermostat pocket
- Boiler control sensor pocket (spare)
- Primary flow 3/4" compression (28mm tails for 400 litre model only)
- Primary return 3/4" compression (28mm tails for 400 litre model only)

## STANDARD APPLIANCE COMPONENTS

- Combination inlet group incorporating pressure reducing valve, strainer, check valve, balanced cold take-off point, expansion relief valve and expansion vessel connection points
- Potable expansion vessel complete with flexible hose and integrated wall bracket
- Tundish
- Dual control thermostat and combined overheat thermostat
- Two port 22mm zone valve for primary circuit
- Wiring junction box for primary system

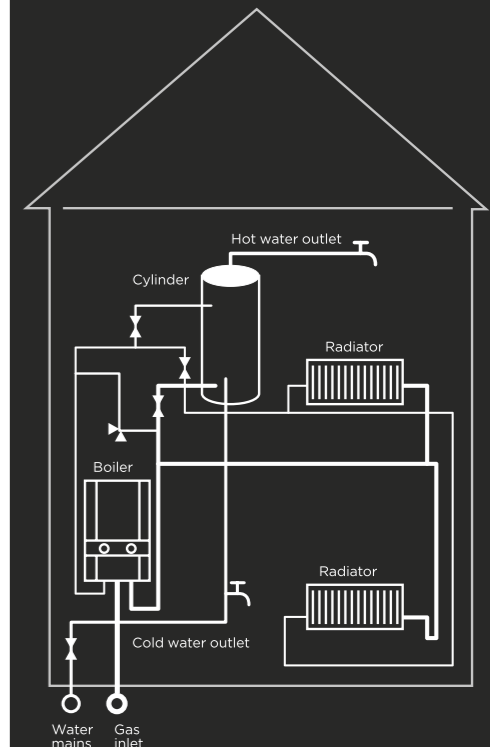

CYLINDER MODEL		IDEAL THERMSTORE IE							
		90	120	150	180	210	250	300	400
SIZE	Height (mm)	764	931	1118	1306	1494	1744	1990	2030
	Diameter (mm)	550	550	550	550	550	550	550	630
	Weight (empty) (kg)	20	23	26	30	33	38	43	55
	Weight (full) (kg)	111	142	174	208	241	286	330	455
	Capacity (litres)	91	119	148	178	208	248	287	393
PERFORMANCE	Pressure regulator (bar)	3	3	3	3	3	3	3	3
	Expansion vessel size (litres)	12	12	18	18	24	24	35	2 x 24
	Rating of primary coil (kW)	16.5	18.0	18.5	19.0	20.5	21.5	25.0	30.5
	Heat up time from 15°C to 60°C (min)	17	21	25	30	32	36	38	41
	Efficiency class	A	B	B	B	B	C	C	C
	Heat loss (watts)	32	39	47	55	62	74	86	87

# Solar Thermstore IE

180 210 250 300 400

**25**  
YEAR WARRANTY\*

25 Year vessel warranty

**2**

Year components warranty



Duplex stainless steel construction



Rubber connection labels with retention foam



Wider base for additional stability



Global Warming Potential (GWP) of 1



New flat top & base with 20% more HCFC insulation



Aligned tapping positions for ease of installation



Low standing heat loss



Lightweight for easy installation



Colour matched components


## MORE FEATURES

- Corrugated heat transfer coil to give 20% faster recovery than plain tube
- Complete with all quality fittings according to model
- Manufactured in accordance with BS EN 12897

To complement our range of solar thermal products, the Ideal Solar Thermstore range of unvented cylinders is now available. With a choice of five sizes, all of which come complete with a 2 year warranty, the Ideal Solar Thermstore range is certain to suit your cylinder needs no matter the situation.

## STANDARD APPLIANCE

- Hot water draw off 3/4" compression
- Temperature and pressure relief valve 92-95°C/6 bar
- Hot water secondary return 3/4" (not fitted to cylinders below 210 litres)
- Immersion heater 1Ø" BSP 3kW
- Cold supply 3/4" compression
- Dual control/overheat thermostat pocket
- Primary flow 3/4" compression - (28mm tails for 400 litre model only)
- Primary return 3/4" compression - (28mm tails for 400 litre model only)
- Solar coil return to collector 3/4" compression
- Solar coil flow from collector 3/4" compression
- Solar thermostat pocket

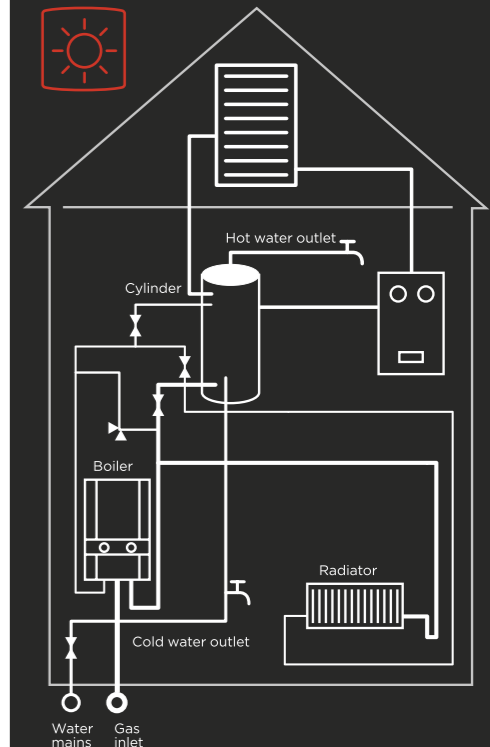

## STANDARD APPLIANCE COMPONENTS

- Combination inlet group incorporating pressure reducing valve, strainer, check valve, balanced cold take-off point, expansion relief valve and expansion vessel connection points
- Potable expansion vessel complete with flexible hose and wall bracket
- Tundish
- Dual control thermostat and combined overheat thermostat
- Two port 3/4" zone valve for primary circuit
- Wiring junction box for primary system



		IDEAL SOLAR THERMSTORE IE				
CYLINDER MODEL		180	210	250	300	400
<b>SIZE</b>	Height (mm)	1306	1494	1744	1990	2030
	Diameter (mm)	550	550	550	550	630
	Weight (empty) (kg)	31	35	40	44	59
	Weight (full) (kg)	209	243	288	331	459
	Capacity (litres)	178	208	248	287	393
<b>PERFORMANCE</b>	Pressure regulator (bar)	3	3	3	3	3
	Expansion vessel size (litres)	18	24	24	35	2 x 24
	Rating of primary coil (kW)	18.0	18.5	19	20.5	22
	Heat up time from 15°C to 60°C (min)	28	35	38	41	45
	Efficiency class	B	B	C	C	C
	Heat loss (watts)	55	62	74	86	87



# Vented Stainless Cylinders

**10**  
YEAR WARRANTY\*



Duplex stainless steel



Supplied fitted with incology immersion



Complete with compression fittings with Irish nut and olives



5/7 loop corrugated coil for maximum heat transfer



Tapping positions to BS1566 specifications



Shower take-off/secondary return on all models




100% recyclable

Manufactured to comply with the standard for stainless steel vented cylinders, these cylinders also have strong environmental credentials including; industry leading 40mm HCFC free insulation, exceptional low standing heat loss and a duplex stainless steel internal cylinder, the product is fully recyclable at the end of its working life

**WITH THE OPEN VENTED STAINLESS STEEL CYLINDER, YOU WILL ALSO BENEFIT FROM;**

- BS1566 compliant
- The very latest automated welding procedures
- Onsite post weld pickling and passivating treatment guaranteeing that the welds are as strong as the parent metal
- Easy access to immersion heater boss
- 400mm diameter models have 3/4" compressions
- 450mm x 900mm model has 3/4" compressions
- Remaining 450mm diameter models have 3/4" compressions on coil and 28mm on cold feed and hot water draw off
- Twin coil range available for use with solid fuel and gravity circulation systems

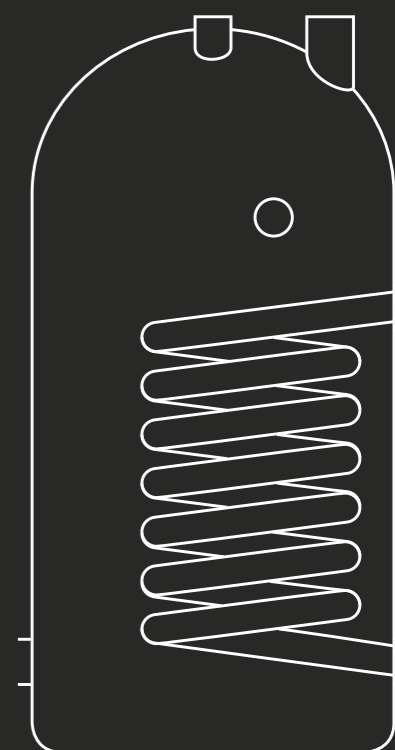

STANDARD RANGE						
Reference	Product Code	ERP Rating	Cylinder height (mm)	Cylinder diameter (mm)	Capacity (litres)	Heat Loss (watts)
P0933200M	SEIE 30X18IND	C	750	450	96	50
P0933202M	SEIE 36X16IND	C	900	400	94	52
P0933204M	SEIE 36X18IND	C	900	450	117	56
P0933206M	SEIE 42X16IND	C	1050	400	112	55
P0933208M	SEIE 42X18IND	C	1050	450	140	71
P0933210M	SEIE 48X18IND	C	1200	450	162	73
P0933212M	SEIE 48X16IND	C	1200	400	132	58
TWIN COIL RANGE						
P0933249M	SEIE30X18IND GRAV	C	750	450	96	50
P0933250M	SEIE36X18IND GRAV	C	900	450	117	56
P0933252M	SEIE42X18IND GRAV	C	1050	450	140	71
P0933254M	SEIE48X18IND GRAV	C	1200	450	162	73

**Please note**

- The twin coil range of cylinders have been specifically designed for gravity circulation and are also suitable for use on pumped systems.
- The gravity coil performance depends upon the correct installation of the pipe work connecting the heat source to the cylinder.

# TECHNICAL SPECIFICATIONS



## Logic Heat IE technical specification

BOILER MODEL		LOGIC HEAT IE				
		H12IE	H15IE	H18IE	H24IE	H30IE
PRODUCT CODE		218265	218266	218267	218268	218269
<b>SIZE</b>	Height (mm)	700	700	700	700	700
	Width (mm)	395	395	395	395	395
	Depth (mm)	278	278	278	278	278
	Weight (packed) kg	26.2	26.2	26.2	26.2	26.2
	Maximum installation weight kg	22.7	22.7	22.7	22.7	22.7
<b>PERFORMANCE</b>	CH output (kW) Min/Max mean 70°C	4.8 - 12.0	4.8 - 15.0	4.8 - 18.0	4.8 - 24.2	6.1 - 30.3
	CH output (kW) Min/Max mean 40°C	5.1 - 13.0	5.1 - 15.9	5.1 - 19.1	5.1 - 25.6	6.4 - 31.0
	DHW output (kW) Max	N/A	N/A	N/A	N/A	N/A
	DHW flow rate l/min. 35°C rise	N/A	N/A	N/A	N/A	N/A
	SEAI HARP (2005) %	91.1	91.1	91.1	91.2	91.1
	NOx Classification	6	6	6	6	6
	Optional LPG kit	No	No	No	Yes	Yes
<b>CONSTRUCTION</b>	Heat exchanger material	Cast Aluminium - Silicon Alloy				
	Burner type	Downward firing pre-mix				
	Fully modulating	Yes	Yes	Yes	Yes	Yes
	DHW plate heat exchanger	N/A	N/A	N/A	N/A	N/A
	Integrated hydrobloc	N/A	N/A	N/A	N/A	N/A
<b>INSTALLATION</b>	Suitable for sealed systems	Yes	Yes	Yes	Yes	Yes
	Suitable for open-vent systems	Yes	Yes	Yes	Yes	Yes
	Filling loop	No	No	No	No	No
	Pre-wired mains lead	No	No	No	No	No
	Flow regulator	N/A	N/A	N/A	N/A	N/A
	In-built system bypass	No	No	No	No	No
	In-built condensate trap/siphon	Yes	Yes	Yes	Yes	Yes
	In-built boiler frost protection	Yes	Yes	Yes	Yes	Yes
	Zero compartment ventilation	Yes	Yes	Yes	Yes	Yes
	<b>CLEARANCES</b>	Top (min. mm) from top of boiler	165 (100 with rear outlet flue)			
Side (mm)		2.5	2.5	2.5	2.5	2.5
Bottom (mm)		100*	100*	100*	100*	100*
Front (mm)		450*	450*	450*	450*	450*
<b>USER INTERFACE</b>		User display	Symbols display, 2 dials, 2 buttons			
	User interface	Digital display & manual controls				
	Diagnostics	Fault diagnosis display				
	User adjustable	Manual heating control				
	'Eco' setting on CH	Yes	Yes	Yes	Yes	Yes
	In-built programmer	No	No	No	No	No
<b>PIPES</b>	Pre-piping kit	No	No	No	No	No
	Stand-off kit	Optional	Optional	Optional	Optional	Optional
	Stand-off kit inc. pipes	No	No	No	No	No
<b>FLUES</b>	Max horizontal	9m	9m	9m	9m	8m
	Max vertical	7.5m <sup>†</sup>	7.5m <sup>†</sup>	7.5m <sup>†</sup>	7.5m <sup>†</sup>	7.5m <sup>†</sup>
	Powered vertical**	22m	22m	22m	22m	22m
	Direct rear flue kit (55/80)	Yes	Yes	Yes	Yes	Yes
<b>CONNECTIONS<sup>††</sup></b>	Gas supply connection	15mm copper compression				
	CH flow connection	22mm copper compression				
	CH return connection	22mm copper compression				
	Inlet connection - DHW	N/A				
	Outlet connection - DHW	N/A				
	Condensate drain	21.5mm universal				
<b>ErP EFFICIENCIES</b>	Condensing boiler	Yes	Yes	Yes	Yes	Yes
	Seasonal space heating efficiency class	A	A	A	A	A
	Rated heat output kW	12	15	18	24	30
	Seasonal space heating energy efficiency ηs%	93	93	93	94	93
	Sound power level, indoors LWA dB	36	38	41	47	49
	Water heating energy efficiency class	N/A	N/A	N/A	N/A	N/A

## Vogue System IE technical specification

		VOGUE SYSTEM IE			
BOILER MODEL		15	18	26	32
PRODUCT CODE		218273	218274	218275	218276
<b>SIZE</b>	Height (mm)	740	740	740	740
	Width (mm)	445	445	445	445
	Depth (mm)	330	330	330	330
	Packaged weight (kg)	35.5	36.3	37.7	39.7
	Installation weight (kg)	30.7	31.5	32.9	34.3
<b>PERFORMANCE</b>	CH output (kW) Min/Max mean 70°C	3.0-15.0	3.6-18.0	5.2-26.0	6.4-32.0
	CH output (kW) Min/Max mean 40°C	3.2-16.2	3.9-19.3	5.6-27.9	6.8-34.3
	DHW output (kW) Max	N/A	N/A	N/A	N/A
	DHW flow rate l/min, 35°C rise	N/A	N/A	N/A	N/A
	SEAI HARP (2005) %	91	91.1	91.1	91.1
	NOx Classification	6	6	6	6
	Optional LPG kit	Yes	Yes	Yes	Yes
<b>CONSTRUCTION</b>	Heat exchanger material	Stainless steel	Stainless steel	Stainless steel	Stainless steel
	Burner type	Pre-mix with cool burner door			
	Fully modulating output	5:1	5:1	5:1	5:1
	DHW plate heat exchanger	N/A	N/A	N/A	N/A
	Integrated hydrobloc	N/A	N/A	N/A	N/A
<b>INSTALLATION</b>	Suitable for sealed systems	Yes	Yes	Yes	Yes
	Suitable for open-vent systems	No	No	No	No
	Filling loop	No	No	No	No
	Pre-wired mains lead	Yes	Yes	Yes	Yes
	In-built system bypass	Yes	Yes	Yes	Yes
	In-built condensate trap/siphon	Yes	Yes	Yes	Yes
	In-built boiler frost protection	Yes	Yes	Yes	Yes
	Safety valve drain outlet pipe	Yes	Yes	Yes	Yes
	Zero compartment ventilation	Yes	Yes	Yes	Yes
<b>CLEARANCES</b>	Top (min. mm) (from top of boiler)	165	165	165	165
	Side (mm)	2.5	2.5	2.5	2.5
	Bottom (mm)	100*	100*	100*	100*
	Front (mm)	450*	450*	450*	450*
<b>USER INTERFACE</b>	User display	Large full colour backlit LCD with text & symbols			
	User interface	Text display & multi-function buttons			
	Diagnostics	Plain English text			
	User adjustable	Manual heating control			
	DHW preheat	N/A	N/A	N/A	N/A
	Pressure gauge	Analogue in control panel			
	In-built programmer	No	No	No	No
<b>PIPES</b>	Stand-off kit	Yes	Yes	Yes	Yes
	Stand-off kit inc. pipes.	Yes	Yes	Yes	Yes
<b>FLUES</b>	Max horizontal	10	10	10	8
	Max vertical	10	10	10	10
<b>CONNECTIONS**</b>	Gas supply connection	22mm copper compression			
	CH flow connection	22mm copper compression			
	CH return connection	22mm copper compression			
	Inlet connection - DHW	N/A			
	Outlet connection - DHW	N/A			
	Condensate drain	21.5mm Universal			
<b>ErP EFFICIENCIES</b>	Condensing boiler	Yes	Yes	Yes	Yes
	Seasonal space heating efficiency class	A	A	A	A
	Rated heat output kW	15	18	26	32
	Seasonal space heating energy efficiency $\eta_s$ %	92.4	93.2	93.1	93.2
	Sound power level, indoors LWA dB	50	52	52	50
	Water heating energy efficiency class	N/A	N/A	N/A	N/A

## Logic System IE technical specification

		LOGIC SYSTEM IE			
BOILER MODEL		S15IE	S18IE	S24IE	S30IE
PRODUCT CODE		215668	215669	215670	215671
<b>SIZE</b>	Height (mm)	700	700	700	700
	Width (mm)	395	395	395	395
	Depth (mm)	278	278	278	278
	Weight (packed) kg	31.6	31.6	31.6	31.6
	Maximum installation weight kg	26.2	26.2	26.2	26.2
<b>PERFORMANCE</b>	CH output (kW) Min/Max mean 70°C	4.8 - 15.0	4.8 - 18.0	4.8 - 24.2	6.1 - 30.3
	CH output (kW) Min/Max mean 40°C	5.1 - 15.9	5.1 - 19.1	5.1 - 25.6	6.4 - 31.0
	DHW output (kW) Max	N/A	N/A	N/A	N/A
	DHW flow rate l/min, 35°C rise	N/A	N/A	N/A	N/A
	SEAI HARP (2005) %	91.2	91.1	91.2	91.1
	NOx Classification	6	6	6	6
	Optional LPG kit	No	No	Yes	Yes
<b>CONSTRUCTION</b>	Heat exchanger material	Cast Aluminium - Silicon Alloy			
	Burner type	Downward firing pre-mix			
	Fully modulating	Yes	Yes	Yes	Yes
	DHW plate heat exchanger	N/A	N/A	N/A	N/A
	Integrated hydrobloc	N/A	N/A	N/A	N/A
<b>INSTALLATION</b>	Suitable for sealed systems	Yes	Yes	Yes	Yes
	Suitable for open-vent systems	No	No	No	No
	Filling loop	No	No	No	No
	Pre-wired mains lead	Yes	Yes	Yes	Yes
	Flow regulator	N/A	N/A	N/A	N/A
	In-built system bypass	Yes	Yes	Yes	Yes
	In-built condensate trap/siphon	Yes	Yes	Yes	Yes
	In-built boiler frost protection	Yes	Yes	Yes	Yes
	Zero compartment ventilation	Yes	Yes	Yes	Yes
<b>CLEARANCES</b>	Top (min. mm) from top of boiler	165	165	165	165
	Side (mm)	2.5	2.5	2.5	2.5
	Bottom (mm)	100*	100*	100*	100*
	Front (mm)	450*	450*	450*	450*
<b>USER INTERFACE</b>	User display	Symbols			
	User interface	2 dials, 2 buttons			
	Diagnostics	Fault diagnosis display			
	User adjustable	Manual heating control			
	'Eco' setting on CH	Yes	Yes	Yes	Yes
	In-built programmer	No	No	No	No
	<b>PIPES</b>	Pre-piping kit	Optional	Optional	Optional
Stand-off kit		Optional	Optional	Optional	Optional
Stand-off kit inc. pipes		Optional	Optional	Optional	Optional
<b>FLUES</b>	Max horizontal	9m	9m	9m	8m
	Max vertical	7.5m	7.5m	7.5m	7.5m
	Powered vertical**	22m	22m	22m	22m
	Direct rear flue kit (55/80)	No	No	No	No
<b>CONNECTIONS**</b>	Gas supply connection	15mm copper compression			
	CH flow connection	22mm copper compression			
	CH return connection	22mm copper compression			
	Inlet connection - DHW	N/A			
	Outlet connection - DHW	N/A			
	Condensate drain	21.5mm universal			
<b>ErP EFFICIENCIES</b>	Condensing boiler	Yes	Yes	Yes	Yes
	Seasonal space heating efficiency class	A	A	A	A
	Rated heat output kW	15	18	24	30
	Seasonal space heating energy efficiency $\eta_s$ %	93	93	94	93
	Sound power level, indoors LWA dB	44	46	48	48
	Water heating energy efficiency class	N/A	N/A	N/A	N/A



## Vogue Combi IE technical specification

		VOGUE COMBI IE		
BOILER MODEL		26	32	40
PRODUCT CODE		218270	218271	218272
<b>SIZE</b>	Height (mm)	740	740	740
	Width (mm)	445	445	445
	Depth (mm)	330	330	330
	Packaged weight (kg)	37.6	38.9	40.9
	Installation weight (kg)	32.4	33.8	35.4
<b>PERFORMANCE</b>	CH output (kW) Min/Max mean 70°C	3.7-18.0	4.6-26.0	5.7-32.0
	CH output (kW) Min/Max mean 40°C	4.0-19.3	4.9-27.9	6.1-34.3
	DHW output (kW) Max	26	32	40
	DHW flow rate l/min, 35°C rise	10.6	13.1	16.4
	SEAI HARP (2005) %	91	91.1	91
	NOx Classification	6	6	6
	Optional LPG kit	Yes	Yes	Yes
<b>CONSTRUCTION</b>	Heat exchanger material	Stainless steel	Stainless steel	Stainless steel
	Burner type	Pre-mix with cool burner door		
	Fully modulating output	7:1	7:1	7:1
	DHW plate heat exchanger	Yes	Yes	Yes
	Integrated hydrobloc	Yes	Yes	Yes
<b>INSTALLATION</b>	Suitable for sealed systems	Yes	Yes	Yes
	Suitable for open-vent systems	No	No	No
	Filling loop	Yes	Yes	Yes
	Pre-wired mains lead	Yes	Yes	Yes
	In-built system bypass	Yes	Yes	Yes
	In-built condensate trap/siphon	Yes	Yes	Yes
	In-built boiler frost protection	Yes	Yes	Yes
	Safety valve drain outlet pipe	Yes	Yes	Yes
	Zero compartment ventilation	Yes	Yes	Yes
<b>CLEARANCES</b>	Top (min. mm) (from top of boiler)	165	165	165
	Side (mm)	2.5	2.5	2.5
	Bottom (mm)	100*	100*	100*
	Front (mm)	450*	450*	450*
<b>USER INTERFACE</b>	User display	Large full colour backlit LCD with text & symbols		
	User interface	Text display & multi-function buttons		
	Diagnostics	Plain English text		
	User adjustable	Manual heating & hot water controls		
	DHW preheat	Yes	Yes	Yes
	Pressure gauge	Analogue in control panel		
	In-built programmer	Optional (Mech. & electronic)		
<b>PIPES</b>	Stand-off kit	Yes	Yes	Yes
	Stand-off kit inc. pipes.	Yes	Yes	Yes
<b>FLUES</b>	Max horizontal	10	8	8
	Max vertical	10	10	10
<b>CONNECTIONS**</b>	Gas supply connection	22mm copper compression		
	CH flow connection	22mm copper compression		
	CH return connection	22mm copper compression		
	Inlet connection - DHW	15mm copper compression		
	Outlet connection - DHW	15mm copper compression		
Condensate drain	21.5mm Universal			
<b>ErP EFFICIENCIES</b>	Condensing boiler	Yes	Yes	Yes
	Seasonal space heating efficiency class	A	A	A
	Rated heat output kW	18	26	32
	Seasonal space heating energy efficiency $\eta_s$ %	92.7	93.1	93
	Sound power level, indoors LWA dB	47	50	49
	Water heating energy efficiency class	A	A	A

## Logic Combi IE technical specification

		LOGIC COMBI IE		
BOILER MODEL		C24IE	C30IE	C35IE
PRODUCT CODE		218262	218263	218264
<b>SIZE</b>	Height (mm)	700	700	700
	Width (mm)	395	395	395
	Depth (mm)	278	278	278
	Weight (packed) kg	33.7	33.7	33.7
	Maximum installation weight kg	28.9	29	29.1
<b>PERFORMANCE</b>	CH output (kW) Min/Max mean 70°C	4.8 - 24.2	6.1 - 24.2	7.1 - 24.2
	CH output (kW) Min/Max mean 40°C	5.1 - 25.6	6.4 - 25.6	7.5 - 25.6
	DHW output (kW) Max	24.2	30.3	35.3
	DHW flow rate l/min, 35°C rise	9.9	12.4	14.5
	SEAI HARP (2005) %	91.1	91.1	91.1
	NOx Classification	6	6	6
	Optional LPG kit	Yes	Yes	No
<b>CONSTRUCTION</b>	Heat exchanger material	Cast Aluminium - Silicon Alloy		
	Burner type	Downward firing pre-mix		
	Fully modulating	Yes	Yes	Yes
	DHW plate heat exchanger	Yes	Yes	Yes
	Integrated hydrobloc	Yes	Yes	Yes
<b>INSTALLATION</b>	Suitable for sealed systems	Yes	Yes	Yes
	Suitable for open-vent systems	No	No	No
	Filling loop	Yes	Yes	Yes
	Pre-wired mains lead	Yes	Yes	Yes
	Flow regulator	Yes	Yes	Yes
	In-built system bypass	Yes	Yes	Yes
	In-built condensate trap/siphon	Yes	Yes	Yes
	In-built boiler frost protection	Yes	Yes	Yes
	Zero compartment ventilation	Yes	Yes	Yes
<b>CLEARANCES</b>	Top (min. mm) from top of boiler	165	165	165
	Side (mm)	2.5	2.5	2.5
	Bottom (mm)	100*	100*	100*
	Front (mm)	450*	450*	450*
<b>USER INTERFACE</b>	User display	Symbols display, 3 dials, 2 buttons		
	User interface	Text display & manual controls		
	Diagnostics	Plain English text		
	User adjustable	Manual heating & hot water controls		
	'Eco' setting on CH	Yes	Yes	Yes
	In-built programmer	Optional	Optional	Optional
<b>PIPES</b>	Pre-piping kit	Optional	Optional	Optional
	Stand-off kit	Optional	Optional	Optional
	Stand-off kit inc. pipes	Optional	Optional	Optional
<b>FLUES</b>	Max horizontal	9m	8m	6m
	Max vertical	7.5m	7.5m	7.5m
	Powered vertical**	22m	22m	22m
	Direct rear flue kit (55/80)	No	No	No
<b>CONNECTIONS**</b>	Gas supply connection	15mm copper compression		
	CH flow connection	22mm copper compression		
	CH return connection	22mm copper compression		
	Inlet connection - DHW	15mm copper compression		
	Outlet connection - DHW	15mm copper compression		
	Condensate drain	21.5mm universal		
<b>ErP EFFICIENCIES</b>	Condensing boiler	Yes	Yes	Yes
	Seasonal space heating efficiency class	A	A	A
	Rated heat output kW	24	24	24
	Seasonal space heating energy efficiency $\eta_s$ %	94	94	94
	Sound power level, indoors LWA dB	48	46	44
	Water heating energy efficiency class	A	A	A

WE BELIEVE  
IN GETTING THE  
MOST OUT OF  
YOUR SYSTEM



SMART CONTROL



RF CONTROL



WEATHER COMPENSATION

confort



# Touch Connect

App controlled heating



Pre-programmed and flexible heating scheduling



Stylish premium design with rotating wheel



Real-time weather updates



Easy to use app and thermostat



Quick and easy installation




Portable wireless thermostat

## Heating Anytime Control Anywhere

Touch Connect is the app controlled thermostat brought to you from Ideal Boilers, offering total heating comfort directly from your smart phone.

### APP CONTROLLED HEATING

The Ideal Touch app is available for iOS & Android offering total control with pre-programmed or flexible scheduling options for effortless and accurate heating in the home. With regular enhancements via app updates, new features will become available with no need to upgrade the Touch unit.



### EASY TO INSTALL

Touch is so easy to install, you could be up and running in less than 5 minutes! Touch doesn't require any hardwiring, just click the transceiver into the boiler, plug the gateway into the router, the device will automatically pair, and you're good to go!

### REMOTE SMART SUPPORT

Ideal's Customer Service team can remotely access any boiler with a Touch Connect thermostat. Should assistance be needed, this allows the team to read information directly from the boiler and enables them to offer real time accurate advice to customers and engineers where necessary.

### TOUCH APP SUPPORT

We believe in world class customer support so if you require any help setting up or using our app please get in touch:

[support@idealtouch.co.uk](mailto:support@idealtouch.co.uk)

TOUCH CONNECT IS COMPATIBLE WITH ALL OF OUR CURRENT COMBI BOILERS



Vogue IE Combi 26 32 40



Logic IE Combi C24 C30 C35



# Controls & accessories



## Touch RF radio frequency controlled heating

As part of our Touch family we have an RF electronic thermostat available to work with a Combi or System and Heat only boilers. The Touch RF thermostats feature a full colour touch screen and a sleek and easy to use design, with rotating outer dial for simple temperature changes.



Stylish aesthetics and easy to use.



## Mechanical Timer

The Ideal Mechanical Timer offers the simplest way of timing a central heating system. With an easy to use tappit selector, and 3 basic modes to choose from (On/Off/Timed) the Mechanical Timer could not be any simpler to use.



Easy to use



3 basic modes to choose from



## Weather Compensation Outdoor Sensor

The Ideal Weather Compensation kit allows the boiler to measure the outside temperature and, using this information, reduces the boiler water flow temperature. This improves the efficiency of the running of the boiler, and therefore reduces energy bills



Measure outdoor weather to improve boiler efficiency



# Accessories

LPG kits for Vogue IE & Logic IE

## KEY FEATURES OF VOGUE KITS

### EACH KIT COMPRISES:

- Burner injector
- Data plate labels
- Instructions

Two data plate labels are provided in the kits inclusive of a new data plate providing LPG details, and a label to retain boiler serial number identity.

### KEY FEATURES

- Available for all Vogue Combi and System models
- Fast & simple conversion using boiler controls and injector

### PRODUCTS APPLICABLE

- Vogue Combi 26IE, 32IE, 40IE kW
- Vogue System 15IE, 18IE, 26IE, 32IE kW

## KEY FEATURES OF LOGIC KITS

- Suitable for most property sizes
- Fast & simple conversion with pre-set gas valve for no product adjustment

### PRODUCTS APPLICABLE

- Logic Combi 24IE & 30IE kW
- Logic Heat 24IE & 30IE kW
- Logic System 24IE & 30IE kW

## NATURAL GAS TO LPG KIT CONTENTS

### EACH KIT COMPRISES:

- Gas valve (preset operation)
- Burner injector
- Data plate labels
- Instructions

Use of a preset gas valve ensures that set up is simple and easy, reducing commissioning time.

Two data plate labels are provided in the kits inclusive of a new data plate providing LPG details, and a label to retain boiler serial number identity.

## LPG HEAT OUTPUTS

BOILER MODEL	LOGIC COMBI 24IE	LOGIC COMBI 30IE	LOGIC HEAT 24IE	LOGIC HEAT 30IE	LOGIC SYSTEM 24IE	LOGIC SYSTEM 30IE	VOGUE COMBI			VOGUE SYSTEM			
							26IE	32IE	40IE	15IE	18IE	26IE	32IE
Min. output (kW)	8	8	8	8	8	8	4.4	5.4	6.7	3.8	4.4	5.2	8.0
Max. output (kW)	24.3	24.3	24.3	30.4	24.3	30.3	18.0	26.0	32.0	15.0	18.0	26.0	32.0
Max. DHW output (kW)	24.2	30.3	N/A	N/A	N/A	N/A	26.0	32.0	40.0	N/A	N/A	N/A	N/A

PRODUCT CODE	NG - LPG CONVERSION KITS
218366	Logic Combi 24IE
218367	Logic Combi 30IE
218368	Logic Heat 24IE
218369	Logic Heat 30IE
215747	Logic System 24IE
215748	Logic System 30IE


PRODUCT CODE	NG - LPG CONVERSION KITS
218370	Vogue Combi 26IE
218371	Vogue Combi 32IE
218372	Vogue Combi 40IE
218373	Vogue System S15IE
218374	Vogue System S18IE
218375	Vogue System S26IE
218376	Vogue System S32IE

# Flue siting

There are a substantial number of flueing options available with the Ideal ranges, giving excellent siting flexibility for almost all applications.

The range of options include standard and telescopic flue as well as roof flue and powered vertical flue options.



To ensure siting issues are kept to a minimum, High Level Flue Outlet kit options and Flue Deflector kits are available.

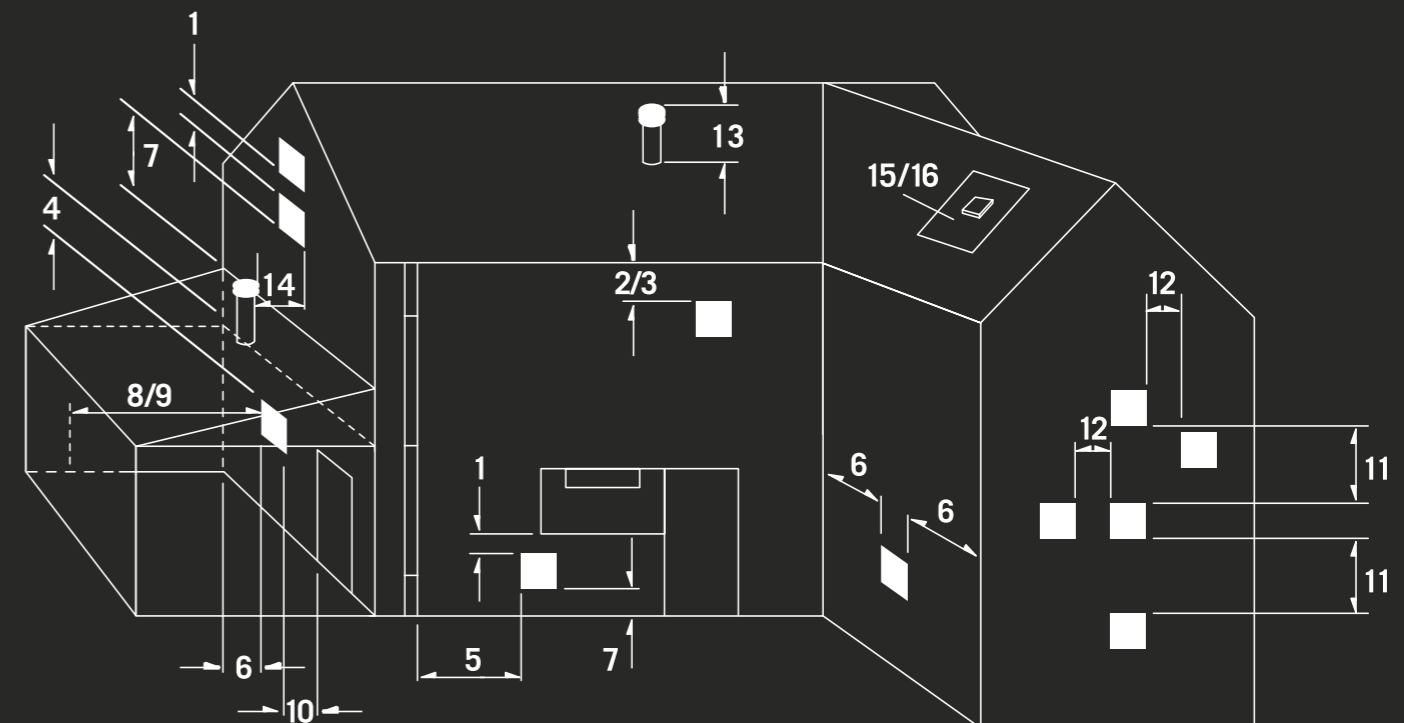


# Flue siting

Minimum dimensions of flue terminal positions

FLUE TERMINAL POSITION	MIN. SPACING
1. Directly below, above or alongside an opening window, air vent or other ventilation opening.	300mm
2. Below guttering, drain pipes or soil pipes BS5440-1	25mm* 75mm
3. Below eaves. BS5440-1	25mm* 200mm
4. Below balconies or car port roof. BS5440-1	25mm* 200mm
5. From vertical drain pipes or soil pipes. BS5440-1	25mm* 150mm
6. From an internal or external corner or to a boundary alongside the terminal. BS5440-1	25mm* 300mm
7. Above ground, roof or balcony level.	300mm
8. From a surface or boundary facing a terminal.	600mm
9. From a terminal facing a terminal.	1200mm
10. From an opening in a car port (eg. door or window) into dwelling.	1200mm
11. Vertically from a terminal on the same wall.	1500mm
12. Horizontally from a terminal on the wall.	300mm

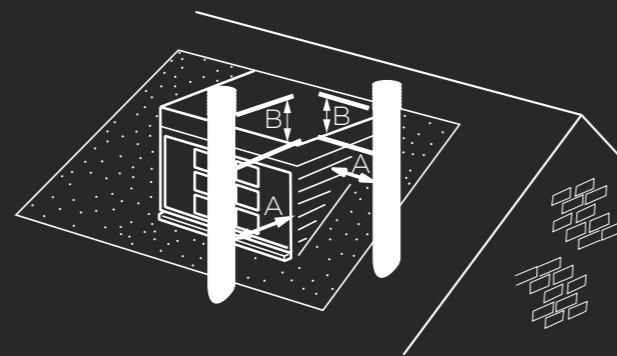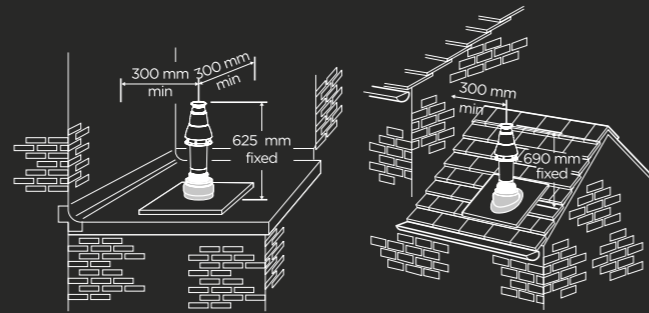

If chimney penetrates dotted area such that A is less than 300mm, B shall not be less than 300mm.

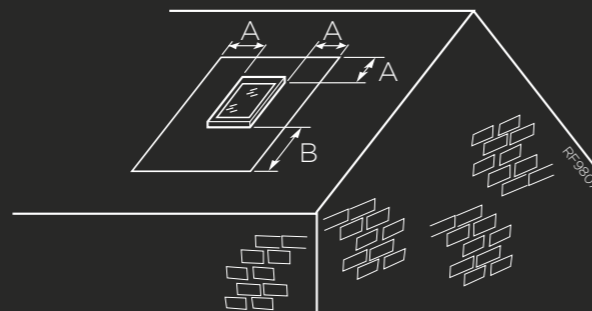

A = 600mm  
B = 2000mm

The flue terminal shall not penetrate the shaded area of the roof.

VERTICAL FLUES	
13. Above the roof pitch with roof slope of all angles.	300mm
Above flat roof.	300mm
14. From a single wall face.	300mm
From corner walls.	300mm
15. Below Velux window.	2000mm
16. Above or side of Velux window.	600mm

# Accessories

Flue kits & flue accessories

## LOGIC & VOGUE

FLUE KITS

PART No.	DESCRIPTION
217442	1m fixed terminal
208171	Horizontal flue terminal (0.6m long)
217442	Horizontal flue terminal (1m long)
208169	Telescopic B pack flue (0.6m long)
208174	Telescopic horizontal flue terminal (1m long)
208290	Raised horizontal flue kit
203129	Flue extension 1m (pack D)
203130	Flue elbow 90 deg kit (60/100)
203131	Flue elbow 45 deg kit (60/100) (pair)
208178	High level flue outlet kit
203228	Flue extension kit 60 dia (1m) for high level flue outlet kit
203229	High level 90 deg elbow
203230	High level 45 deg elbow (pair)
152258	Weather collar universal 100 dia (fits slate & tiles)
152259	Weather collar flat roof 100 dia

PART No.	DESCRIPTION
208176	Rear flue outlet kit 55/80 (Heat only boilers)
205990	High level outlet kit 55/80 (Heat only boilers, rear flue only)
205989	Balcony flue outlet kit
208177	Flue extension 0.5m kit (Pack D)
211037	Flue extension 2m kit (Pack D)
211038	Roof flue kit (with vertical connector)
211039	Soffit kit 60/100
211302	Soffit kit 60/100
205247	Flue bracket kit
208175	Flue vertical connector
205024	Concentric flue screw retaining kit
155988	Flue finishing kit
203134	Flue powered vertical terminal 100 dia
203136	Vertical powered flue kit
210803	Roof terminal extension 60/100

## VOGUE ACCESSORIES

PART No.	DESCRIPTION
208442	Stand off kit Combi and System
217088	Stand off kit (including piping) Vogue IE Combi
217089	Stand off kit (including piping) Vogue IE System
205419	Kit - DHW expansion vessel kit
159991	Condensate pump kit
204565	Secondary pressure relief valve kit
205217	Security bracket kit

## LOGIC ACCESSORIES

PART No.	DESCRIPTION
211103	Stand off kit Combi and System
211101	Stand off kit (including upward piping; combi)
211330	Stand off kit with pipes Logic IE System
206153	Stand off kit Heat
211328	Terminal wall plate RS kit IE combi & system
206164	Terminal wall plate kit RS replacement (heat)
205419	DHW expansion vessel kit
211041	Pre-piping kit (Combi IE)
211331	Pre-piping kit (System IE)
205217	Security bracket kit
159991	Condensate pump kit
204565	Secondary pressure relief valve kit





# WE BELIEVE IN REWARDING OUR INSTALLERS

## INSTALLER CONNECT

Installer Connect is the award-winning loyalty scheme from Ideal Boilers. With a wide range of features including warranty registrations and rewards. Installer Connect has a lot to offer to any Ideal installer.

Freephone:

**0044 330 333 1513**

Email:

**[enquiries@installerconnect.com](mailto:enquiries@installerconnect.com)**

**[www.installerconnect.com](http://www.installerconnect.com)**



WORK  
WEAR



GADGETS  
& GIFTS



LEISURE  
BREAKS



HIGHSTREET  
VOUCHERS



# SMILE ITS IDEAL



INSTALLER CONNECT



EASY REGISTRATION



EARN POINTS

## EASY WARRANTY REGISTRATIONS

The Installer Connect app available for iOS and Android on the go by simply scanning the boiler barcode and filling in the information. You can then access warranty as PDFs whenever you need them.

## EARN POINTS - REDEEM REWARDS

You can earn up to €30 per install with Installer Connect which soon adds up and can then be used to claim the biggest variety of rewards available. Here is how many points you earn on our boilers (see chart on page opposite).

## SYSTEM



LOGIC IE



VOGUE IE



EVOMAX

## EUROS PER BOILER

VALUE IN POINTS

€20

50 POINTS

€30

75 POINTS

€30

75 POINTS



## THE MARKETING TOOLBOX

is a unique opportunity for you to take your points and double them in value to claim on items such as:

- Workwear
- Advertising (newspaper, local radio etc.)
- Van livery
- Web design

WE CAN TAILOR YOUR DOUBLE POINTS TO ANY MARKETING NEED YOU HAVE HELPING YOUR BUSINESS GROW WITH IDEAL.

Spending your points couldn't be simpler. Choose the reward you would like to receive, add it to your basket, then go to your basket and press "Redeem Now" - we'll do the rest. The points you use will be automatically deducted from your allocation immediately so you can keep an eye on how many you've got to redeem at anytime.



WORK WEAR



GADGETS & GIFTS



LEISURE BREAKS



HIGHSTREET VOUCHERS



# WE BELIEVE IN PROVIDING FIRST CLASS TRAINING



COMBI BOILERS



SYSTEM BOILERS



HEAT BOILERS



# Training

## DOMESTIC BOILERS

### COURSES ARE AVAILABLE ON THE FOLLOWING PRODUCTS:

Logic IE Range  
(Combi, Heat and System)

Vogue IE Range  
(Combi and System)

Evomax Range

These comprehensive one day courses can be tailored for individual installation and servicing companies. The courses use a simple step-by-step approach with hands-on training to ensure all aspects of commissioning, servicing, and fault finding can be dealt with quickly and efficiently.

The courses involve discussions with trainers and demonstrations with practical advice. Lunch and refreshments are provided and a certificate is awarded upon completion.

### EACH COURSE COVERS THE FOLLOWING:

- Product range overview
- Product specification
- Application and installation of products
- Electronic circuits and components
- Flue and accessory options
- Component overview, change and repair
- User controls
- Sequence of operation
- Fault finding
- Commissioning
- OpenTherm

**PRICE: FREE**

# How to book

ONCE YOU HAVE DECIDED WHICH TRAINING COURSE IS RIGHT FOR YOU BOOK YOUR COURSE OR FOR FURTHER INFORMATION CONTACT US ON:

**0044 1482 498 432**

EMAIL:

**TECHNICAL.TRAINING@  
IDEALBOILERS.COM**

BOOK ONLINE:

**IDEALBOILERS.COM/TRAINING**

